



## Digital Band Selective RF Repeater



### OVERVIEW

ATNJ RF repeater with industrial design, combines multi mobile network signals together and improves the mobile voice and data communication, aiming to provide a more cost-effective solution for signal. ATNJ RF repeater is easy to install and maintain, which could help signal providers get fast solution.

A repeater is working as a relay between the BTS and mobiles. It picks up the strongest signal from BTS via the Donor Antenna, linearly amplifies the signal and then re-transmits it via the Indoor Signal Distribution System to the weak/blind coverage area. And the mobile signal is also amplified and re-transmitted to the BTS via the opposite direction.


### FEATURES

- Improve any two mobile networks at the same time
- LCD display the input/output signal strength
- Auto isolation detect function
- Auto gain control
- Auto level control
- Supports from 0.2 to 20MHz bandwidth adjusted(Customized).
- Smart LCD to guide the installation
- Wifi control and monitor

### WHERE TO USE

- Indoor: Hotels, Exhibition Centers, Basement, Parking Lots, Shopping Malls, Apartments..
- Outdoor: Airport, Tunnel, Village, Mining Area, Court, Tourism Area..

# APPLICATION SCENE

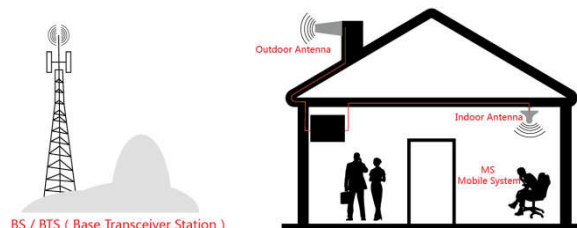

## Technical Specification

SPECIFICATIONS		PARAMETERS	
Frequency Range		WCDMA 2100	1920-1980MHz/2110-2170MHz
Bandwidth		WCDMA 2100	from 0.2 to 20MHz bandwidth adjusted
Gain		70dB	
Automatic Gain Control		31dB	
MGC (Step Attenuation)		20dB@ 1dB/Step	
Output Power		17 ± 3dBm	
Spurious Emission	9 kHz -150 kHz/1kHz	≤-36dBm	
	150 kHz - 30 MHz/10kHz	≤-36dBm	
	30 MHz - 1 GHz/100kHz	≤-36dBm	
	1 GHz- 12.75 GHz/1MHz	≤-30dBm	
ACPR		Uplink Fully comply with 3GPP 36.106	
		Downlink Fully comply with 3GPP 36.106	
Unwanted emissions		Fully comply with 3GPP 36.106	
VSWR		≤2	
Ripple		≤3dB	
Noise Figure		≤5dB	
Delay		≤1 μ s	
I/O Impedance		50Q	
RF Connector		SMA-Type (Female)	
Operating Temperature		-25°~+55°	
Power Supply		DC 5V	
Power consumption		≤0.2W	
Environment Conditions		IP43	

Humidity	≤90%
Weight	0.3kg
Size	173*123*35 (mm)